



MobileCollect Wireless

RS-232/USB Base Receiver

Part #: MC-BASE-RS232


Features

- Supports all MobileCollect Wireless transmitter models
- Supports U-Wave-T, TC, & TM transmitter models
- Supports CDI CORE & VRS "Long-Range" indicators
- Data transfer via DB9 serial or USB serial
- Power provided by USB AC power adapter (included)
- Range up to 133 feet / 40 meters
- Status LEDs
- External Read switch input
- Field upgradable firmware
- Made in the USA

Specifications

Size	3.63" x 2.61" x 1.10" (L x W x H)	Baud Rates	9600 - 19.2K - 38.4K baud
Weight	3.05 oz	LED Status Indicators	Power On Wireless Data Packet Received Received Signal Strength (3 LEDs)
Range	Up to 133' line of site indoors	Output Format	Multiple output options, configured via Windows PC setup program
Power Requirements	DB9 output - 5VDC USB AC power adapter USB output - 5VDC via USB computer port	Frequency	2.4 GHz (2.4000 to 2.4835) ISM band (Industrial, Scientific, & Medical)
PC Connection	RS-232 via USB port RS-232 via DB9 serial port	Operating Temperature & Humidity	32° to 122° F 90% humidity; non-condensing
Read Switch Connectors	One on front of unit. Option for two additional on front (3 total)	Certifications	FCC, IC, CE, RoHS, REACH

Front View

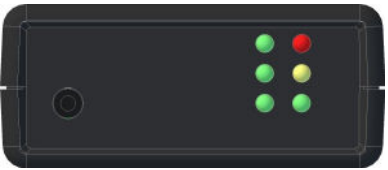

Read Switch Connector

LED Status Indicators

Rear View



Reset Button

RS232 Serial Output

AC Power in or USB Serial output