



# MobileCollect Wireless

## RS-232/USB Base Receiver

Part #: MC-BASE-RS232


### Features

- Supports all MobileCollect Wireless transmitter models
- Supports U-Wave-T, TC, & TM transmitter models
- Supports CDI CORE & VRS "Long-Range" indicators
- Data transfer via DB9 serial or USB serial
- Power provided by USB AC power adapter (included)
- Range up to 133 feet / 40 meters
- Status LEDs
- External Read switch input
- Field upgradable firmware
- Made in the USA

### Specifications

<b>Size</b>	3.63" x 2.61" x 1.10" (L x W x H)	<b>Baud Rates</b>	9600 - 19.2K - 38.4K baud
<b>Weight</b>	3.05 oz	<b>LED Status Indicators</b>	Power On Wireless Data Packet Received Received Signal Strength (3 LEDs)
<b>Range</b>	Up to 133' line of site indoors	<b>Output Format</b>	Multiple output options, configured via Windows PC setup program
<b>Power Requirements</b>	DB9 output - 5VDC USB AC power adapter USB output - 5VDC via USB computer port	<b>Frequency</b>	2.4 GHz (2.4000 to 2.4835) ISM band (Industrial, Scientific, & Medical)
<b>PC Connection</b>	RS-232 via USB port RS-232 via DB9 serial port	<b>Operating Temperature &amp; Humidity</b>	32° to 122° F 90% humidity; non-condensing
<b>Read Switch Connectors</b>	One on front of unit. Option for two additional on front (3 total)	<b>Certifications</b>	FCC, IC, CE, RoHS, REACH

**Front View**

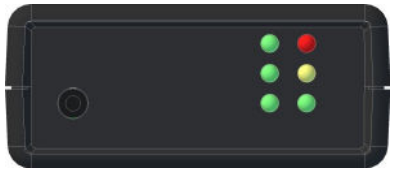

**Read Switch Connector**

**LED Status Indicators**

**Rear View**



**Reset Button**

**RS232 Serial Output**

**AC Power in or USB Serial output**