

MobileCollect wireless

How to install or replace a
Digital or Command Mobile
Module gage cable



MobileCollect Wireless



*Measurement Collection Specialists
Connect Any Gage into Any Software*

Remove Cover

- Remove the Mobile Module cover by removing the 3 screws
- These instructions are in Section 7.4 of the MobileCollect Hardware Components User Guide




MobileCollect Wireless

MICRO RIDGE

*Measurement Collection Specialists
Connect Any Gage into Any Software*

Attach new cable

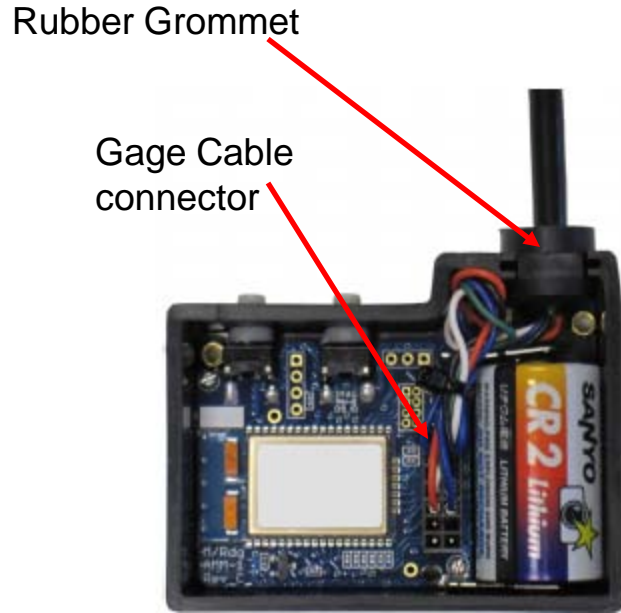

Mobile Module Gage Cable


- Locate the 14-pin connector inside the Mobile Module
- Slide the female cable connector onto the male transmitter pins
 - Install the cable with the individual wires orientated towards the top of the Mobile Module
- Press the rubber grommet into the transmitter housing and replace the cover
 - Do not over-tighten the screws.

MobileCollect Wireless

MICRORIDGE

*Measurement Collection Specialists
Connect Any Gage into Any Software*

Test New Cable

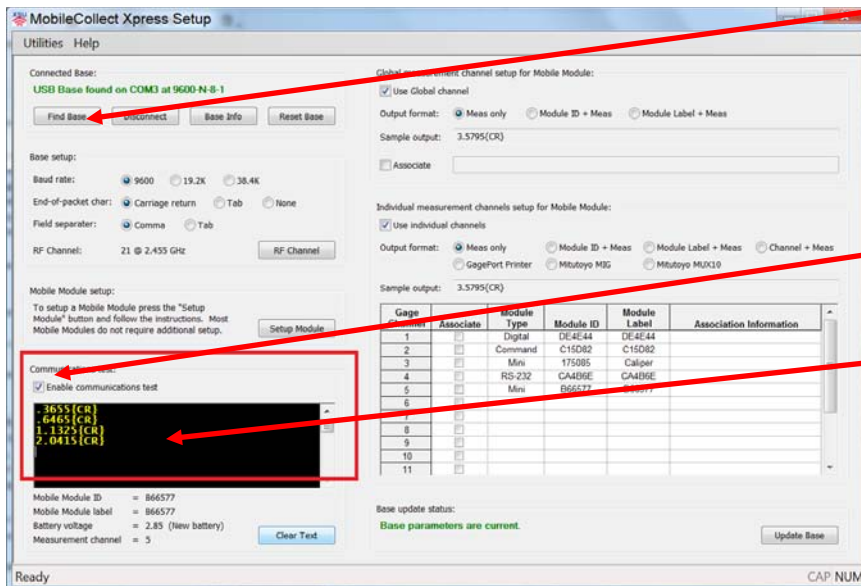

- Open the Xpress Setup program and click on the “Find Base” button
- Associate the Mobile Module with the Base if not already done
- Check the “Enable Communications Test” box.
- Place your cursor in the test window (black box).
- Connect the Mobile Module cable to your gage and take a reading.
 - If the gage reading appears in the test window, you’ve successfully completed the process.

MobileCollect Wireless

MICRO RIDGE

*Measurement Collection Specialists
Connect Any Gage into Any Software*